


60Hz

Flygt 2660

MEET THE NEW MEMBER OF YOUR DEWATERING TASK FORCE

When water is your challenge, Flygt 2600 is your answer.

With a comprehensive range of pumps to suit any task, the Flygt 2600 series is the solution used to get the job done in mining, construction, industrial or municipal applications all over the world. The Flygt 2600 series have reliability built-in with innovative ways of reducing wear on the impeller and seal.

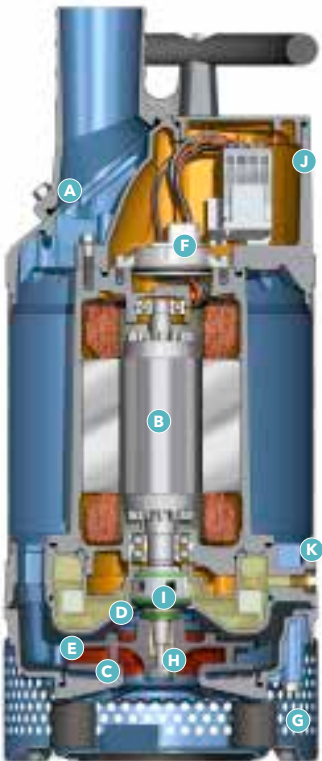


- A Air valve**
The cooler the motor, the better the performance.
- B Class H motor**
- C Dura-Spin™**
The unique closed impeller and the suction cover which reduces wear.
- D Spin-Out™**
Protects the outer seal from abrasive particles.
- E Hard-Iron™ impeller and suction cover**
- F Sealed off terminal board**
- G Strainer bottom with shock absorbers**
- H Single impeller adjustment screw**
- I Aluminium Plug-in™ seal**
- J Inspection cover**
- K External inspection and oil plugs**



FLYGT
a xylem brand

Performance

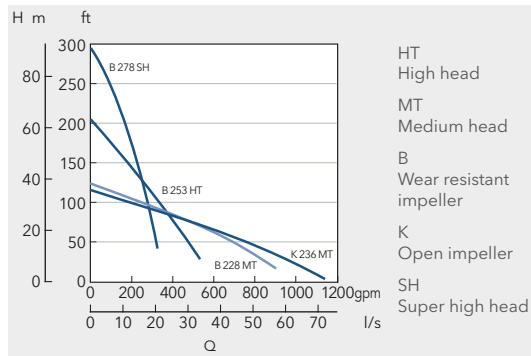

Rating

15.0 hp (11.2 kW) / 3-phase / 3,465 rpm

Voltage V	Rated current A	Starting current A
200 D	40	250
220 D	37	222
220 Y parallel	37	213
230 D	35	233
230 Y parallel	35	224
240 D	35	245
240 Y parallel	35	235
380 D	21	128
380 Y parallel	21	128
400 D	20	136
400 Y parallel	21	135
440 D	19	129
440 D serial	18	111
440 Y serial	18	107
460 D	19	135
460 D serial	18	117
460 Y serial	18	112
480 D	20	142
480 Y serial	17	117
575 D	14	96
600 D	14	101

Denomination

Product code	2660.181
Installation	Portable
Discharge connection	4"/6"
Impeller characteristics	High head/medium head (HT/MT), Wear resistant impeller (B) with Dura-Spin™, Open (K), Super high head (SH)

Process data

Liquid temperature	max 104°F (40°C), standard
Depth of immersion	max 65 feet (20 m)
Liquid density	9.2 lb. per US gal. (1100 kg/m ³)
Strainer hole dimension	ø 0.39" (10.0 mm)
The pH of the pumped liquid	pH 5-8

Motor data

Frequency	60 Hz
Insulation class	H, 360°F (180°C)
Voltage variation	max ± 10% - continuously running max ± 10% - intermittent running
Voltage imbalance	max 2% - between phases max 30 - No. of starts/hour

Monitoring equipment

Thermal contacts	284°F (140°C)
------------------	---------------

Cables

SUBCAB®	SUBCAB® Submersible cable
---------	---------------------------

Materials

Outer casing	Stainless steel
Impeller	Hard-Iron®
Wear parts	Nitrile rubber/Hard-Iron®
Stator housing	Aluminum
Strainer	Stainless steel
Shaft	Stainless steel
O-rings	Nitrile rubber
Discharge connection	Aluminium

Mechanical face seals

Inner Active Seal™	Aluminium oxide/Tungsten carbide
Outer	Tungsten carbide/Tungsten carbide

Weight and dimensions

Weight (excl. cable)	172 lbs. (78 Kg)
Height	31.6" (803 mm)
Width	ø 13.6" (346 mm)

Options

Warm liquid version	Warm liquid version max 158°F (70°C)
Quick couplings	
Starters	

Accessories

Tandem connections, hose connections and floating rafts. Electrical accessories such as pump controllers, control panels and monitoring relays. Zinc anodes.

xylem
Let's Solve Water

XYLEM
Gesällvägen 33
174 87 Sundbyberg, Sweden
Tel +46 8 475 60 00
www.xylem.com
www.flygt.com

