

# NC100 Dri-Prime® Pump

The Godwin Dri-Prime NC100 pump is an extremely powerful yet compact pump with flow capabilities to 1070 USGPM.

The NC100 features the unique patented Flygt N-technology with its innovative self-cleaning impeller.

NC Series pumps are engineered to deliver sustained high efficiency resulting in lower energy and fuel costs while reducing unplanned downtime.

This makes the NC100 a best-in-class portable pump suitable for both sewage and clean water applications.



## Features and Benefits

- Dri-Prime (continuously operated Venturi air ejector priming device) requiring no periodic adjustment. Optional compressor clutch available.
- Incorporates N-technology for non-clog performance, sustained high efficiency and long-term energy/fuel savings.
- Hard-Iron™ (EN12513:2000) impeller and insert ring.
- Dry-running, high-pressure oil bath mechanical seal with highly abrasion resistant silicon carbide faces.
- Close-coupled centrifugal pump mounted to a diesel engine or electric motor for easy pumpend or engine/motor changeover in the field.
- Also available in a critically silenced unit which reduces noise levels to less than 70 dBA at 30'.
- Standard engine Yanmar 3TNV88 (IT4 Flex). Also available with Caterpillar C1.5T (IT4 Flex).


## Specifications

Suction connection	4" 150# ANSI B16.5
Delivery connection	4" 150# ANSI B16.5
Max capacity	1070 USGPM †
Max Impeller diameter	10.1"
Max operating temp	176°F*
Max working pressure	71 psi
Max suction pressure	58 psi
Max casing pressure	107 psi
Max operating speed	2200 rpm

\* Please contact our office for applications in excess of 176°F.

† Larger diameter pipes may be required for maximum flows.

## Performance Curve

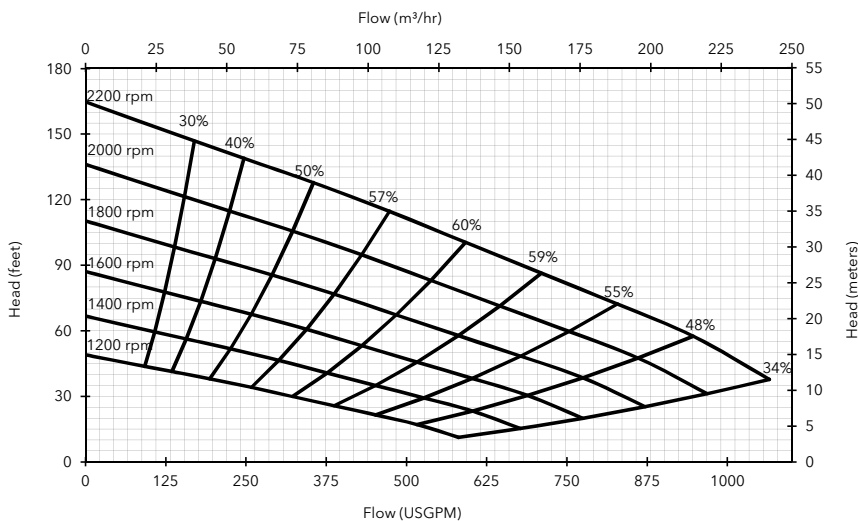

### Engine option 1

Yanmar, 3TNV88 (IT4 Flex), 30 HP @ 2200 rpm

Impeller diameter 10"

Pump speed 2200 rpm

#### Suction Lift Table

Total Suction Head (feet)	Total Delivery Head (feet)				
	33	66	98	148	131
	Output (USGPM)				
10	1013	793	528	88	-
15	925	748	484	66	-
20	815	704	440	22	-
25	625	599	396	-	-

Fuel capacity: 60 US Gal

Max Fuel consumption @ 2200 rpm: 1.6 US Gal/hr

Max Fuel consumption @ 1800 rpm: 1.4 US Gal/hr

Weight (Dry): 2,240 lbs

Weight (Wet): 2,660 lbs

Dimensions: (L) 119" x (W) 66" x (H) 77"

Performance data provided in tables is based on water tests at sea level and 20°C ambient. All information is approximate and for general guidance only. Please contact the factory or office for further details.

## Materials

Pump casing & suction cover	Cast iron BS1561:1997
Wearplates	Front - Hard Iron EN12513:2000 Rear - Cast Iron BS1561:1997 0
Pump Shaft	Carbon steel BS970:1991 817M40T
Impeller	Hard Iron EN12513:2000
Non-return Valve body	Cast iron BS1561:1997
Mechanical Seal	Silicon carbide face; Viton elastomers; Stainless steel body

### Engine option 2

Caterpillar, C1.5T (IT4 Flex), 34 HP @ 2200 rpm

Impeller diameter 10"

Pump speed 2200 rpm

#### Suction Lift Table

Total Suction Head (feet)	Total Delivery Head (feet)				
	33	66	98	148	131
	Output (USGPM)				
10	1013	793	528	88	-
15	925	748	484	66	-
20	815	704	440	22	-
25	625	599	396	-	-

Fuel capacity: 60 US Gal

Max Fuel consumption @ 2200 rpm: 2.1 US Gal/hr


Max Fuel consumption @ 1800 rpm: 1.8 US Gal/hr

Weight (Dry): 1,900 lbs

Weight (Wet): 2,120 lbs

Dimensions: (L) 119" x (W) 66" x (H) 77"

Performance data provided in tables is based on water tests at sea level and 20°C ambient. All information is approximate and for general guidance only. Please contact the factory or office for further details.

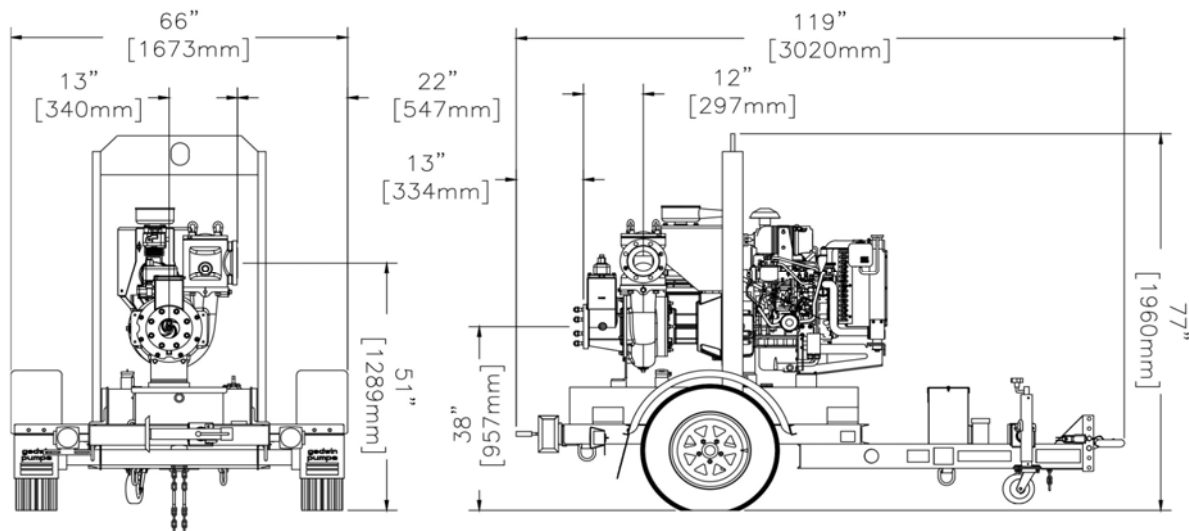

84 Floodgate Road  
Bridgeport, NJ 08014 USA  
(856) 467-3636 . Fax (856) 467-4841  
Email: sales@godwinpumps.com

Reference number : 95-1807-3000  
Date of issue : February 26, 2014  
Issue : 7

[www.godwinpumps.com](http://www.godwinpumps.com)